
## **Specifications**

Throughput:

Over 80% of the source

Divergence:


Numerical Aperture 0.59



Core (mm) d0	End Fit (mm d1		Tube (mm) d3	Min.Bend Radius (mm)
3	5	9	7	40
5	7	10	9.5	60
8	10	15	12.5	100

Single Leg Dual leg Tripple Leg

Input

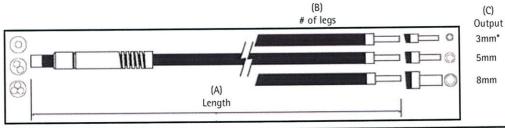

А	В	С	D	
Overall length	# of Legs	Active output Diameter	Wavelength Range	
750mm	1	3mm*	320-600nm	(Standard)
1000mm	2	5mm	250-600nm	(Extended)
1500mm	3	8mm		
2000mm				
3000mm				

\*Note: For multi-legged light guides the active output diameter must be 3mm.

Please submit your light guide request to EXFO Photonic Solutions Division for design validation, pricing, and lead time.

				T 1 4 005 001 0000 Fave 1 005 021 2055
	EXFO PHOTONIC SOLUTIONS	2260 Argentia Road	Mississauga (Ontario) L5N 6H7	Tel.: 1 905 821-2600 . Fax.: 1 905 821-2055
	TOLL-FREE	Tel.: 1 800 668-8752		
	CORPORATE HEADQUARTERS	465 Godin Avenue	Vanier (Quebec) G1M 3G7 CANADA	Tel.: 1 418 683-0211 . Fax.: 1 418 683-2170
	EXFO AMERICA	1201 Richardson Drive, Suite 260	Richardson TX 75080 USA	Tel.: 1 800 663-3963 . Fax.: 1 972 907-2297
-	EXFO EUROPE	Le Dynastuer, 10/12 rue Andras Beck	92366 Meudon la Forêt Cedex FRANCE	Tel.: +33.1.40.83.8585 . Fax.: +33.1.40.83.04.42
	EXFO ASIA-PACIFIC	151 Chin Swee Road, #03-29 Manhattan House	SINGAPORE 169876	Tel.: +65 333 8241 . Fax.: +65 333 8242
	TOLL-FREE (USA and Canada)	Tel.: 1 800 663-3936	www.exfo.com • info@exfo.com	

EXFO is certified ISO 9001 and attests to the quality of these products. This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept amy interference received, including interference that may cause undesired operation. EXFO has made every effort to ensure that the information cantained in this specification sheet is accurate. However we accept no responsibility for any errors or omissions, and we reserve the right to modify design, characteristics and products at any time without obligation. Units of measurement in this document conform to SI standards and practices. Contact EXFO for prices and availability or to obtain the phone number of your local EXFO distributor. For the most recent version of this spec sheet, please go to the EXFO website at http://www.exfo.com/support/techdocs.asp

In case of discrepancy, the Web version takes precedence over any printed literature.



(C)